


# NON-Structural

## Lateral Flat Strap

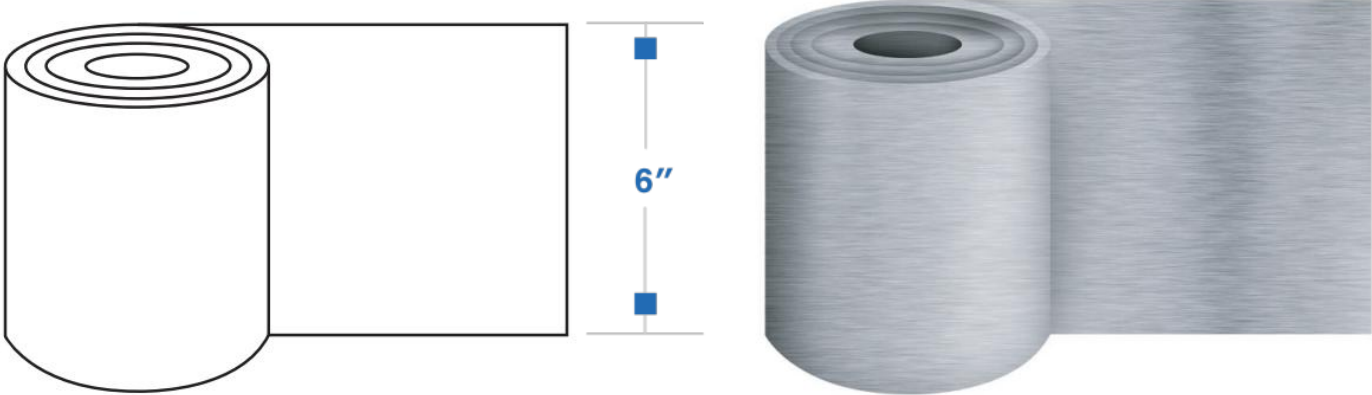

\*Picture is reference only; it may differ from the actual product

This tension element is designed to be placed as a wind bracing between tracks diagonally located to transfer loads.

### Geometric properties

Panel Rey’s Metal Lateral Flat Strap is produced from hot-dip galvanized steel and has a standard G40 galvanized coating. It is manufactured with a width of 6in.

**10’ length & 6” width as standard for the product. Custom orders are available. Please check with your sales contact.**

Product Data	
Length*:	10’
Pieces per bundle*:	200
Total linear feet	2000

\*Consult your sales agent for special length measurements  
\* Maximum pieces per bundle, amount could change per request.

### Steel Thickness

Reference Gauge USA	Design thickness (in)	Thickness (Mils)	Minimum thickness (in)
20	0.0346	33	0.0329

### ASTM Standards and Compliance Codes

**All Panel Rey® Lateral Flat Strap meet or exceed the following ASTM and Construction standards:**

- ASTM A653 *Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process*
- ASTM A924/A924M *Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process.*
- ASTM A1003 *Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members*

### LEED Credits

- **Leed v4 MR.** Raw Material Supply
- **Leed v4 MR.** Construction and Demolition Waste Management.
- **Leed v3 MR2.** Construction Waste Management. The steel used is 100% recyclable.
- **Leed v3 MR4.** Recycled Content. The steel used in the profiles has a minimum of:
  - Total recycled content: **46%**
  - Post-consumer recycled content: **37%**
  - Pre-Consumer recycled content: **9%**

### Storage

Store in a dry place to protect from moisture.

Panel Rey México, S. A. has the authority to make changes to the information in this document without prior notice. It is not possible to keep all the regulations related to the system up to date, therefore, the user must know these rules.  
All claims must be in writing and supported by evidence; They must be sent within a period not exceeding 30 calendar days from the date the defect was discovered or should have been discovered and must be within the product warranty period.  
The client should not alter or repair the affected area until Panel Rey has reviewed the problem and determines the possible cause. The responsibility of Panel Rey México S. A. is limited only to the replacement of the defective material and is not responsible for incidental and unforeseen damages, direct or indirect, or any loss caused by the application of these products that does not conform to the instructions or the intended use, as well as the application of the product after the expiration date.

TDS-NS600LFS33.V2025-1.0



www.panelrey.com  
1800 862 9022