
# LATERAL FLAT STRAP



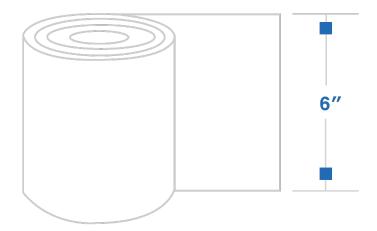

This tension element is designed to be placed as a wind bracing between tracks diagonally located to transfer loads.

## **GEOMETRIC PROPERTIES**

Panel Rey's metal strap is produced from hot-dip galvanized steel and has a standard G40 galvanized coating. It is manufactured with a width of 6 in.

• 10' length & 6" width as standard for the product. Custom orders are available. Please check with your Sales Contact.

PRODUCT DATA			
Length:	10'		
Pieces per pallet:	200		
Total linear feet:	2000		

#### STEEL THICKNESS

REFERENCE GAUGE	DESIGN	THICKNESS	MINIMUM
USA	THICKNESS (IN)	(MILS)	THICKNESS (IN)
20	0.0346	33	0.0329

### **ASTM STANDARDS AND COMPLIANCE CODES**

### All Panel Rey® Lateral Flat Strap meet or exceed the following ASTM standards:

- · ASTM A1003/A1003M Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
- · ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

### **LEED CREDITS**

- · Leed v4 MR. Raw Material Supply
- · Leed v4 MR. Construction and Demolition Waste Management.
- · Leed v3 MR2. Construction Waste Management. The steel used is 100% recyclable
- · Leed v3 MR4. Recycled Content. The steel used in the profiles has a minimum of:
  - Total recycled content: 40%
  - Post-consumer recycled content: 27%
  - Pre-Consumer recycled content: 13%

#### STORAGE

Store in a dry place to protect from moisture.

Panel Rey México, S. A. has the authority to make changes to the information in this document without prior notice. It is not possible to keep all the regulations related to the system up to date, therefore, the user

All claims must be in writing and supported by evidence; They must be sent within a period not exceeding 30 calendar days from the date the defect was discovered or should have been discovered and must be

within the product warranty period.

The client should not alter or repair the affected area until Panel Rey has reviewed the problem and determines the possible cause. The responsibility of Panel Rey México S. A. is limited only to the replacement of the defective material and is not responsible for incidental and unforeseen damages, direct or indirect, or any loss caused by the application of these products that does not conform to the instructions or the intended use, as well as the application of the product after the expiration date.

