



COMPOUND

READY MIX PRO-TOP

**PRO-TOP
TOPPING**

COMPOUND **READY MIX PRO-TOP**



Description

The PRO-TOP compound by Panel Rey®, specifically designed for topcoat applications, has the advantage of low shrinkage, smooth application and easy sanding. This product is ideal for projects that demand high quality and efficiency.

PRO-TOP compound is manufactured under strict quality controls to meet ASTM C-475 (Standard Specification for Joint Compound and Tape Finishing Gypsum Board) and is manufactured using first-class raw materials and technology that offers the quality that is expected from Panel Rey® across its entire range of products.

The PRO-TOP Compound is used in joint finishing and corner molding, fastener repair, texturing, and drywall crack repair. This compound provides an ideal surface to apply paint or receive the desired finish, thanks to the smooth surface after drying.

Advantages

- Easy mixing
- Sands easily
- Easy application
- Crack-resistant
- Tinted

Recommendations

- Keep the product in suitable storage conditions, avoiding that it remains exposed to the environment and to extreme temperatures below 10 °C (50 °F), even during its application.
- Apply to clean and completely dry surfaces.
- In case of being applied as texture, it may require to be diluted; it is recommended to add clean water in small portions of up to 2% water on the weight of the product, to avoid excess water that causes lack of adherence or cracking.
- The warranty date of the product is 9 months after its date of manufacture. Try to rotate the inventory and not use product that has spent more than this time in storage.
- Keep out of the reach of children. Review safety precautions.

PRODUCT INFORMATION

Packaging	3.5-Gal (13.2 L) box.
Color	Yellow
Adhesion	Good
Density	1.58 - 1.65 g / cm
Coverage	1.4m ² /Kg
Shrinkage	Low
Cracking	Crack-resistant

1.- All products comply with the ASTM C-475 standard. The information presented does not represent a product specification but is shown based on the experience of technical personnel.

2.- Drying time is variable depending on environmental conditions.

Joint treatment procedure:


It is recommended to apply Panel Rey® PRO-TOP compound to adhere the joint tape and cover the tape.

Apply the coats once the previous application has completely dried.



Finishing

- It is recommended to place PRO-TOP by Panel Rey® for the upper and the finish layers.
- If you consider that the finish requires it, use wet sandpaper to refine the edges that are not perfectly smooth.
- For a better finish, cover all nail heads, screws, corner pieces and flanges, fading up to approximately 6 in (15 cm) around each accessory.
- When using base paint, texture, etc., it must be anchored with a vinyl sealer in line with the recommendations provided by the manufacturer. For stone finishes, use an adhesive recommended by the manufacturer or distributor of these finishes. It is recommended never to remove the paper on the board because, far from improving the adhesion, it weakens the drywall core.
- It is recommended to review the Finish Levels recommended by the Gypsum Association GA-214 or to review a technical summary provided by Panel Rey® as Recommended Finish Levels.

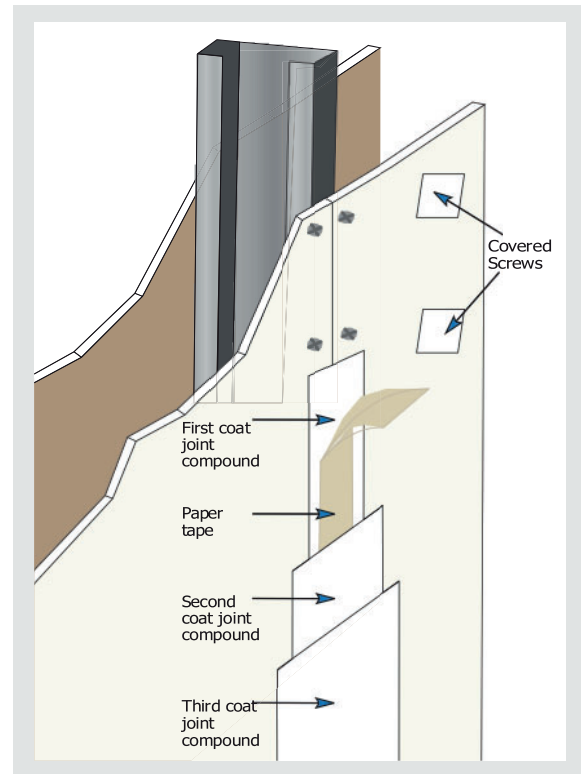

Precautions

Avoid dust by wet sanding. Wear a mask and safety glasses. Dust created by sanding or mixing can cause eye, nose or throat irritation. If eye contact occurs, rinse thoroughly with water for 15 minutes to remove particles. If irritation persists, contact a physician. Do not ingest the product. KEEP OUT OF REACH OF CHILDREN.

Panel Rey México, S. A. has the authority to modify the information in this document without prior notice. Because it is not possible to be aware of all the normativity related to the product, the user must take such regulations into account. All claims must be in writing and supported by evidence; they must be sent within a period of no more than 30 calendar days from the date the defect was discovered or should have been discovered and must be within the product's warranty period. The client should not alter or repair the affected area until Panel Rey has reviewed the problem and determined a possible cause. The responsibility of Panel Rey México, SA is limited solely to the replacement of defective material and is not responsible for incidental and unforeseen direct or indirect damages, nor for any loss caused by the application of these products that is not in accordance with the instructions or with the intended use, as well as the application of the product after the expiration date.





FOR MORE INFORMATION:

Customer service
1 800 862 9022

Telephone
(81) 8345-0055

e-mail
contact.us@gpromax.com

Web site
www.panelrey.com

Panel Rey S.A.
Serafin Peña #935 Sur Col. Centro
Z.C. 64000 Monterrey, N.L.

