



COMPOUND

READY MIX ULTIMA LIGHT X

Ultima Light X
PANEL REY

COMPOUND READY MIX ULTIMA LIGHT X



Excellent for taping and topping

Description

The Ultima Light X joint compound by Panel Rey®, is the lightest product in the Panel Rey family, it is designed with outstanding attributes to achieve a more professional finish. It has the ideal rheology to facilitate taping and as the most versatile product of the family, it can be adjusted to the desired consistency for fine finishes. Additionally, it has been formulated to offer superior crack-resistance and lower shrinkage.

Ultima Light compound is manufactured under strict quality controls to meet ASTM C-475 (Standard Specification for Joint Compound and Tape Finishing Gypsum Board) using first-class raw materials and technology that offers the quality that is expected from Panel Rey® across its entire range of products.

Ultima Light X is used in taping, joint finishing, corner molding, fastener repair, texturing, and drywall crack repair. This compound provides an ideal surface to apply paint or any desired finish thanks to the smooth surface after drying.

Advantages

- 30% lighter than a conventional compound
- Less shrinkage

- Superior adhesion
- Adjustment versatility
- Achieves the highest performance¹
- Easy to sand
- Smoother finish

¹ Compared to conventional products.

Recommendations

- Keep the product in suitable storage conditions, avoiding prolonged exposure to the environment and temperatures below 10 °C, even during its application.
- Apply to clean and completely dry surfaces.
- When being applied as a texture product, it may require dilution; it is recommended that clean water be added in small portions of up to 2% water by weight of the product to avoid excess water that causes lack of adherence or cracking.
- The warranty date of the product is 6 months after its date of manufacture. It is recommended that inventory be rotated and do not use product that has spent more than the recommended shelf-life in storage.
- Keep out of the reach of children. Review safety precautions.

PRODUCT INFORMATION

| | |
|-----------|---|
| Packaging | 3.5-Gal (13.2 L) box |
| Color | White |
| Adhesion | Excellent |
| Density | 1.06 - 1.23 g / cm ³ |
| Coverage | Approximately 9.0 gal./1,000 sq. ft. (36.7 L/100 sq. m) |
| Shrinkage | Very Low |
| Cracking | Crack-resistant |

1.- All products comply with the ASTM C-475 standard. The information presented does not represent a product specification but is shown based on the experience of technical personnel.

2.- Drying time is variable depending on environmental conditions.



Joint treatment procedure:

It is recommended to apply 3 coats of Ultima Light X by Panel Rey® be applied to adhere and embed the joint tape and then prepare the surface for the final finish.

If it is determined that the finish requires or warrants it, use wet sandpaper to sand the edges to achieve perfectly smoothness.

Apply each coat after the previous coat has completely dried.


Finishing

When using base paint, texture, etc., it must be anchored with a vinyl sealer in line with the recommendations provided by the manufacturer. For stone finishes, use an adhesive recommended by the manufacturer or distributor of these finishes. It is recommended never to tear off the paper from the drywall because far from improving adhesion, it weakens the drywall core.

Precautions

Avoid dust by wet sanding. Wear a mask and safety glasses. Dust created by sanding or mixing can cause eye, nose or throat irritation. If eye contact occurs, rinse thoroughly with water for 15 minutes to remove particles. If irritation persists, contact a physician. Do not ingest the product. KEEP OUT OF REACH OF CHILDREN.

Panel Rey México, S. A. has the authority to modify the information contained in this document without prior notice. Because it is not possible to be aware of every possible variables and scenarios related to the use of this product, the user must make reasonable judgement and take extenuating scenarios into account. All claims must be in writing and supported by evidence; They must be sent within a period of no more than 30 calendar days from the date the defect was discovered or should have been discovered and must be within the product's warranty period. The client should not alter or repair the affected area until Panel Rey has reviewed the problem and determined a probable cause. The responsibility of Panel Rey México, SA is limited solely to the replacement of defective material and will not be responsible for incidental and unforeseen direct or indirect damages, nor for any loss caused by the application of these products that is not in accordance with the instructions or with the intended use, as well as the application of the product after its expiration date.

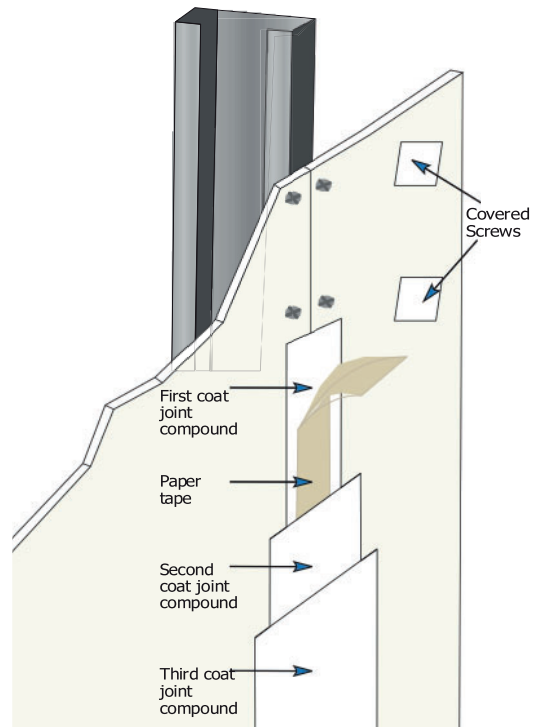



FOR MORE INFORMATION:

Customer service
1 800 862 9022

Telephone
(81) 8345-0055

e-mail
contact.us@gpromax.com

Web site
www.panelrey.com

Panel Rey S.A.
Serafin Peña #938 Sur Col. Centro
Z.C. 64000 Monterrey, N.L.

