


# “J” Flange

This profile protects the edges of plaster panels. It is installed horizontally on the lower part of the wall at a minimum of 5 mm above the floor. This prevents the plaster panel from coming into contact with water in case of spillages.

It is also used in expansion joints in all applications in which the edges of the plaster panel need to be protected. Can be installed both horizontally and vertically.

Dimensions (in)

Width A	Caliber	Flank B	Step C	Tab D	Nominal Length L
+ 1/8					
1/2	26	0.450 - 0.550	0.800 - 1.000	0.100 - 0.200	± 1/8

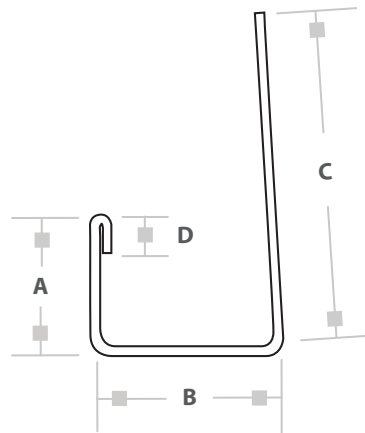

For more information contact us:

Customer Service USA  
1 800 862 9022

Phone  
+52 (81) 8345-0055

E-mail  
contact.us@gpromax.com

Web Site  
www.panelrey.com