

Topping Panel Rey[®] FINISHPRO Joint Compound

Topping FINISHPRO from Panel Rey[®] is a specialized compound for topping. It is easy to mix and has a smooth application. Its light-yellow color makes it easier to identify in which stage a job is. It also has a smooth finish and easy sanding that make it an excellent option for jobs that require a level 5 finish.

Advantages

- Easy sanding and smooth finish.
- Smooth application.
- Low shrinkage and cracking resistant.

Product information:

- Packaging: 3.5 gal. carton (13.2 L)
- Coverage: 6.4 ft² /lb (1.3 m²/kg)

Application:

- Final coats.
- Texturing
- Smooth finishes

Preparation:

Mix contents uniformly without adding water for covering fasteners and corner beads. For taping and finishing joints, thin as necessary by adding clean water especially for use in mechanical tools. Do not add more than 2% (by weight of product) of water because it may cause cracking and bonding problems. Re-mix uniformly after thinning. Do not mix with other products. This product is manufactured to meet requirements established in ASTM-C475.



How to use / Second and third coat

When the compound is completely dry, approximately 8 hours later, apply a second coat with a 10" taping knife using Finish Pro from Panel Rey then smooth the surface. Repeat the same process for the third coat with a 12" taping knife. Screw heads, fasteners and accessories must be cover with three coats of compound. For more information check GA-236 manual.

How to use / Finishing


At the end of the third coat, the joint treatment should be 12" width. After the last coat has dried, lightly sand the joint and the covered accessories, leaving the wall ready for the skim coat. All accessories should be covered with three layers of compound. Before applying, make sure that these are clean and dry to avoid product detachment.

Storage

Store the product in a fresh and dry place. Do not stock the pallets one on top of each other. Protect from freezing or extreme heat. The product warranty is 9 months after its manufacturing date.

Hazards

Avoid dust from damp sanding. Use a mask and safety goggles. Dust resulting from sanding may irritate eyes, nose, or throat. In the event of visual contact, thoroughly wash with water for 15 minutes until all particles are removed. If irritation persists, get medical attention. Do not ingest this product. **KEEP OUT OF THE REACH OF CHILDREN.** For more safety information refer to the SDS on Panel Rey's website.

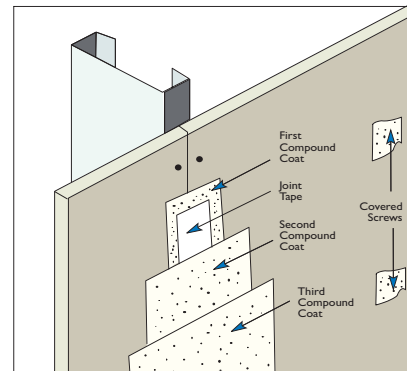

For more information contact us:

Customer Service USA
1 800 862 9022

Phone
+52 (81) 8345-0055

E-mail
contact.us@gpromax.com

Web Site
www.panelrey.com



Panel Rey México, S. A. retains the power to exercise modifications to the information in this document without prior notice. It is not possible to consider all the regulations related to the product, therefore, the user must take these rules into account. All claims must be in writing and supported with evidence; They must be sent within a period not exceeding 30 calendar days from the date on which the defect was discovered or should have been discovered and must be within the warranty period of the product. The client must not alter or repair the affected area until Panel Rey has reviewed the problem and determines a possible cause. The responsibility of Panel Rey México, SA is limited only to the replacement of the defective material and is not responsible for incidental or direct, indirect or indirect damages, nor for any loss caused by the application of these products that is not in accordance with the instructions or with the intended use, as well as the application of the product after the expiration date

